

Standards:

Common Lengths: 28-53 feet

Width: 96 - 102 inches

Height: 12.5 - 13.5 feet

Door Type: Swing Door/Roller door (equip varies by carrier)

Capacity:

Max Weight @ 53 ft length:

45,000 lbs

Max Pallets @ 53 ft: 26 pallets

Usage:

Used to carry most common

freight (boxed, crated, palletized,

etc.)

Common Standard Freight Trailer Specifications

	Overall			Interior		Rear	Door	Capacity	Max Weight
Length	Width	Height	Length	Width	Height	Width	Height		
40 ft	96"	12′ 6″	39′ 6″	92.5"	94.5"	92"	92"	2,398 cu ft	11,300 lbs
43 ft	96"	13′ 0″	41′ 6″	92.5"	100.5"	92"	98"	2,711 cu ft	11,900 lbs
48 ft	102"	13′ 6″	47′ 6″	98.5"	100.6"	98"	100.6"	3,465 cu ft	13,500 lbs
53 ft	102"	13′ 6″	47′ 6″	98.5"	108"	94"	102"	3,489 cu ft	13,500 lbs

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer.

This is only a guide and should not be used as a definitive reference for dock planning.



Standards:

Common Lengths: 22-26 feet

Width: 96 - 102 inches **Height:** 12.5 - 13.5 feet

Door Type: Swing Door/Roller

Door (varies by carrier)

Capacity:

Max Weight @ 26 ft length:

14,000 lbs

Max Pallets @ 26 ft: 12 pallets

Usage:

Available Options:

Lift Gate Refrigeration



Standards:

Common Lengths: 28 feet

Width: 96 - 102 inches

Height: 12.5 - 13.5 feet

Door Type: Swing Door/Roller

Door (varies by carrier)

Capacity:

Max Weight @ 28 ft length:

22,000 lbs

Max Pallets @ 28 ft: 14 pallets

Usage:

Available Options:

Lift Gate

Single, Tandem & Triple

Shipping Container

Standards:

Common Lengths: 20, 40, 45, 48, 53 feet


Width: 98 - 102 inches Height: 8.5 — 9.5 feet Door Type: Swing Door

Capacity:

Max Weight @ 40 ft length: 71,390 lbs

Usage:

Designed to transport cargo internationally




Common Shipping Container Specifications

	20'	40′	45'	48'	53'
Length	19′ 10″	40′	45′	48′	53′
Inside Length	19' 4"	39′ 6″	44.6′	47.6′	52.3"
Height	8′ 6″	8′ 6″	9' 6"	9′ 6″	9' 6"
Inside Height	7′ 9″	7′ 10″	8′ 10″	8′ 10″	8′ 10″
Door (H x W)	7′6″ X 7′ 8″	7'6" X 7' 8"	8′ 6″ X 7′ 8″	8′ 6″ X 7′ 8″	8′ 6″ X 7′ 8″
Width	8′	8'	8′	8′ 6″	8′ 6″
Inside Width	7' 8"	7' 8'	7′ 8″	8′ 2″	8′ 2″
Capacity	1,170 ft ³	2,390 ft ³	2,700 ft ³	3,000 ft ³	3,800 ft ³

 $\label{thm:continuous} \textbf{Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer.}$

This is only a guide and should not be used as a definitive reference for dock planning.

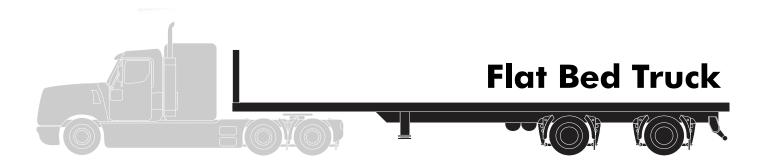

Standards:

Common Lengths: 20, 40, 45, 48 feet

Width: 98 - 102 inches

Capacity:

Max Weight @ 40 ft length: 71,390 lbs

Usage:

Designed to transport oversized cargo that won't normally fit into a standard sized trailer

Common Flat Bed (Platform) Specifications

Ove	erall	Max Weight
Length	Width	
26 ft	96"	55,000 lbs
40 ft	96"	55,000 lbs
45 ft	102"	55,000 lbs
48 ft	102"	55,000 lbs

Data provided for illustrative purposes only. Actual equipment in use varies by carrier and manufacturer.

This is only a guide and should not be used as a definitive reference for dock planning.